


2/17/2026 4:17:00 PM
ALL IDEAS, DESIGNS AND ARRANGEMENTS INDICATED ON THESE DRAWINGS ARE THE PROPERTY OF THE ARCHITECT AND ARE TO BE USED IN CONNECTION WITH THIS SPECIFIC PROJECT AND SHALL NOT BE USED OTHERWISE WITHOUT THE EXPRESSED CONSENT OF THE ARCHITECT.



A1 LEVEL 02-ENLARGED PLAN - SECTOR C

A1 / IA4.60-5

1/8" = 1'-0"

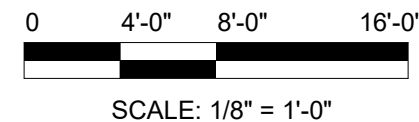

GENERAL NOTES

- CONTRACTOR TO FIELD VERIFY ALL DIMENSIONS.
- REFER TO SHEET A1 / IA1.15-5 FOR REQUIRED ACCESSIBILITY CLEARANCES AND CLEAR WIDTH FOR ACCESSIBLE ROUTES.
- ALL IDF AND ELECTRICAL ROOMS TO RECEIVE FIRE TREATED PLYWOOD ON ALL SIDES UP 6'-0" AFF.
- PROVIDE 4'-0" GLASS FIBER REINFORCED PANELS AROUND SINKS IN ALL JANITOR ROOMS.
- PROVIDE BACKING FOR ALL WALL MOUNTED EQUIPMENT, ACCESSORIES, AND FIXTURES. ALL EQUIPMENT OVER 5'-9" TALL TO BE ANCHORED.
- EXPOSED GWB WALLS TO RECEIVE A LEVEL 5 FINISH, UON. ALL UTILITY ROOMS TO RECEIVE A LEVEL 3 FINISH.
- ALL JANITOR'S ROOMS TO HAVE WATERPROOF FLOOR ASSEMBLY THAT TURNS UP MIN. 6" AT STUD WALLS.
- PROVIDE LEAK DETECTION IN THE FOLLOWING ROOMS: MPOE, MAIN ELECTRICAL, JANITOR'S ROOMS, EV CHARGING ROOM. PROVIDE 6" CURB AT STUD WALLS IN ALL OF THESE LOCATIONS.
- WALL SWITCHES, FIRE ALARMS & SMOKE DEVICES, AND OTHER CEILING DEVICES/REGISTERS TO MATCH ADJACENT WALL/CEILING FINISHES/COLORS, TYP.
- ASSS FINISHES, WHERE EXPOSED TO BE MINIMUM LEVEL 4.
- LOCATE DOORS 4" FROM ADJACENT WALLS. UON.
- ALL INTERIOR JOINT SEALANTS TO MATCH ADJACENT SURFACE FINISHES/COLORS.
- SEE STRUCTURAL FOR SLAB DEPRESSIONS AND COORDINATE DEPTHS OF UNDERLAYMENTS ACCORDINGLY FOR LEVEL FLOOR TRANSITIONS.
- REFER TO BOARD STARTING & DEVICE CENTERING AND ALIGNMENT LOCATIONS NOTES IN FINISH PLANS AND INTERIOR ELEVATIONS FOR FACTORS DRIVING FINISH PATTERN LAYOUT.
- FRAMELESS DOORS WITH CONCEALED HINGES TO BE PROVIDED AT ALL PUBLIC FACING DOORS.
- ALL BASEBOARDS TO BE FLUSH PAINTED MDT. UON.
- UON. FIRE EXTINGUISHER CABINETS TO BE RECESSED WITH FLAT SQUARE EDGE TRIM, STEEL SHEET DOORS AND 1/8 INCH THICK CLEAR FLOAT GLASS SET IN RESILIENT CHANNEL GLAZING GASKET.
- REFER TO FINISH PLANS FOR CENTERLINE OF FLOOR FINISH TRANSITIONS.
- REFER TO ARCHITECT'S DRAWINGS (SEPARATE PERMIT SUBMITTAL) FOR ALL EXTERIOR SHELL COMPONENTS (WALLS, ROOFS, ETC.) AND ALL STAIRS.
- INTERIOR FINISH MATERIALS APPLIED TO WALLS AND CEILINGS SHALL MEET THE FIRE PERFORMANCE AND SMOKE DEVELOPMENT LIMITATIONS PRESCRIBED IN CBC SECTION 803.1 (CBC 801.2).
- INTERIOR FINISH MATERIALS APPLIED TO FLOORS SHALL MEET THE FIRE PERFORMANCE LIMITATIONS PRESCRIBED IN CBC SECTION 804.1 (CBC 801.3).

REFERENCE KEYNOTES

NUMBER	KEYNOTE TEXT
055100-01	ALTERNATE TREAD ALUMINUM STAIRS
079514-11	SEISMIC FLOOR JOINT (NOT RATED) WITH CUSTOM FINISH TO MATCH ADJACENT FLOOR FINISH, TYPE IS-J-01
079514-12	SEISMIC WALL JOINT (NOT RATED), FIELD PAINTED, TYPE IS-J-02
238316-01	RADIANT FLOORING MANIFOLDS WITH CONCEALED ACCESS PANEL


SHEET KEYNOTES

NUMBER	SHEET NOTE TEXT
110	INTERIOR VERTICAL WOOD SCREEN
149	FIRE-RATED MECHANICAL SHAFT ENCLOSURE
150	EXTERIOR BUILDING ENVELOPE AND FACADE SYSTEM, UNDER SEPARATE PERMIT (BY OTHERS)
152	STAIRS, UNDER SEPARATE PERMIT (BY OTHERS)

FLOOR PLAN LEGEND

- AREA NOT IN SCOPE (BY OTHERS)
- WALL, SEE WALL TYPES ON SHEET IA6.00-5
- 1 HOUR FIRE BARRIER PER CBC SECTION 707
- 2 HOUR FIRE BARRIER PER CBC SECTION 707
- 2 HOUR FIRE WALL, UNDER SEPARATE PERMIT
- 3 HOUR FIRE BARRIER PER CBC SECTION 707
- RECESSED FIRE EXTINGUISHER CABINET WITH CUSTOM DOOR
- FIRE EXTINGUISHER
- CARD READER
- CARD READER/ AUTO DOOR OPENER
- AUTO DOOR OPENER
- AUTOMATED EXTERNAL DEFIBRILLATOR
- DRINKING FOUNTAIN
- BRACE FRAME UNDER SEPARATE PERMIT (BY OTHERS)

KEYLEGEND_SECTOR C

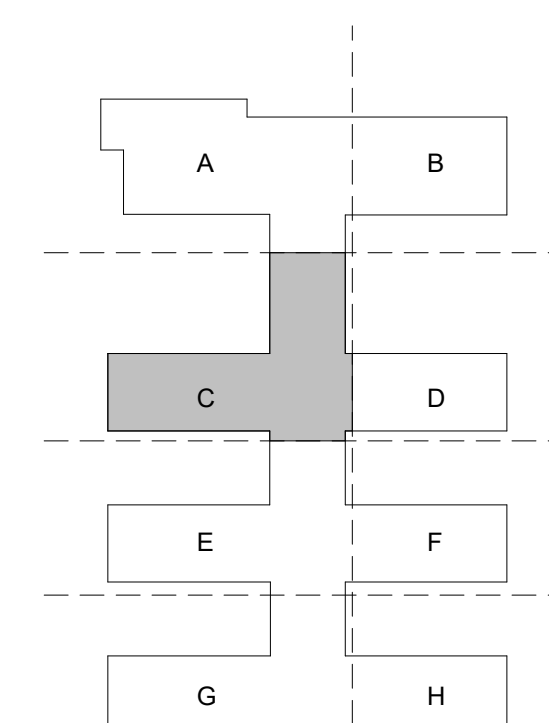

MARINE WAY CAMPUS - MAIN BLDG.

1 SIERRA MEADOW, IRVINE, CA 92618

PROJECT NO. 24353

REV NO.	DATE ISSUED	REASON
2025.11.04	BID SET	
2025.12.09	PERMIT SUBMITTAL	
2026.02.17	BID SET ADDENDUM 1	


RECEIVED
February 18, 2026
MATT CONSTRUCTION

CP-5 BID SET ADDENDUM 1
2026.02.17

Sheet Title
FLOOR PLAN - LVL 2
- SECTOR C

Sheet No.
IA1.23-5

2/17/2026 4:17:08 PM
ALL IDEAS, DESIGNS AND ARRANGEMENTS INDICATED ON THESE DRAWINGS ARE THE PROPERTY OF THE ARCHITECT AND ARE TO BE USED IN CONNECTION WITH THIS SPECIFIC PROJECT AND SHALL NOT BE USED OTHERWISE WITHOUT THE EXPRESSED CONSENT OF THE ARCHITECT.

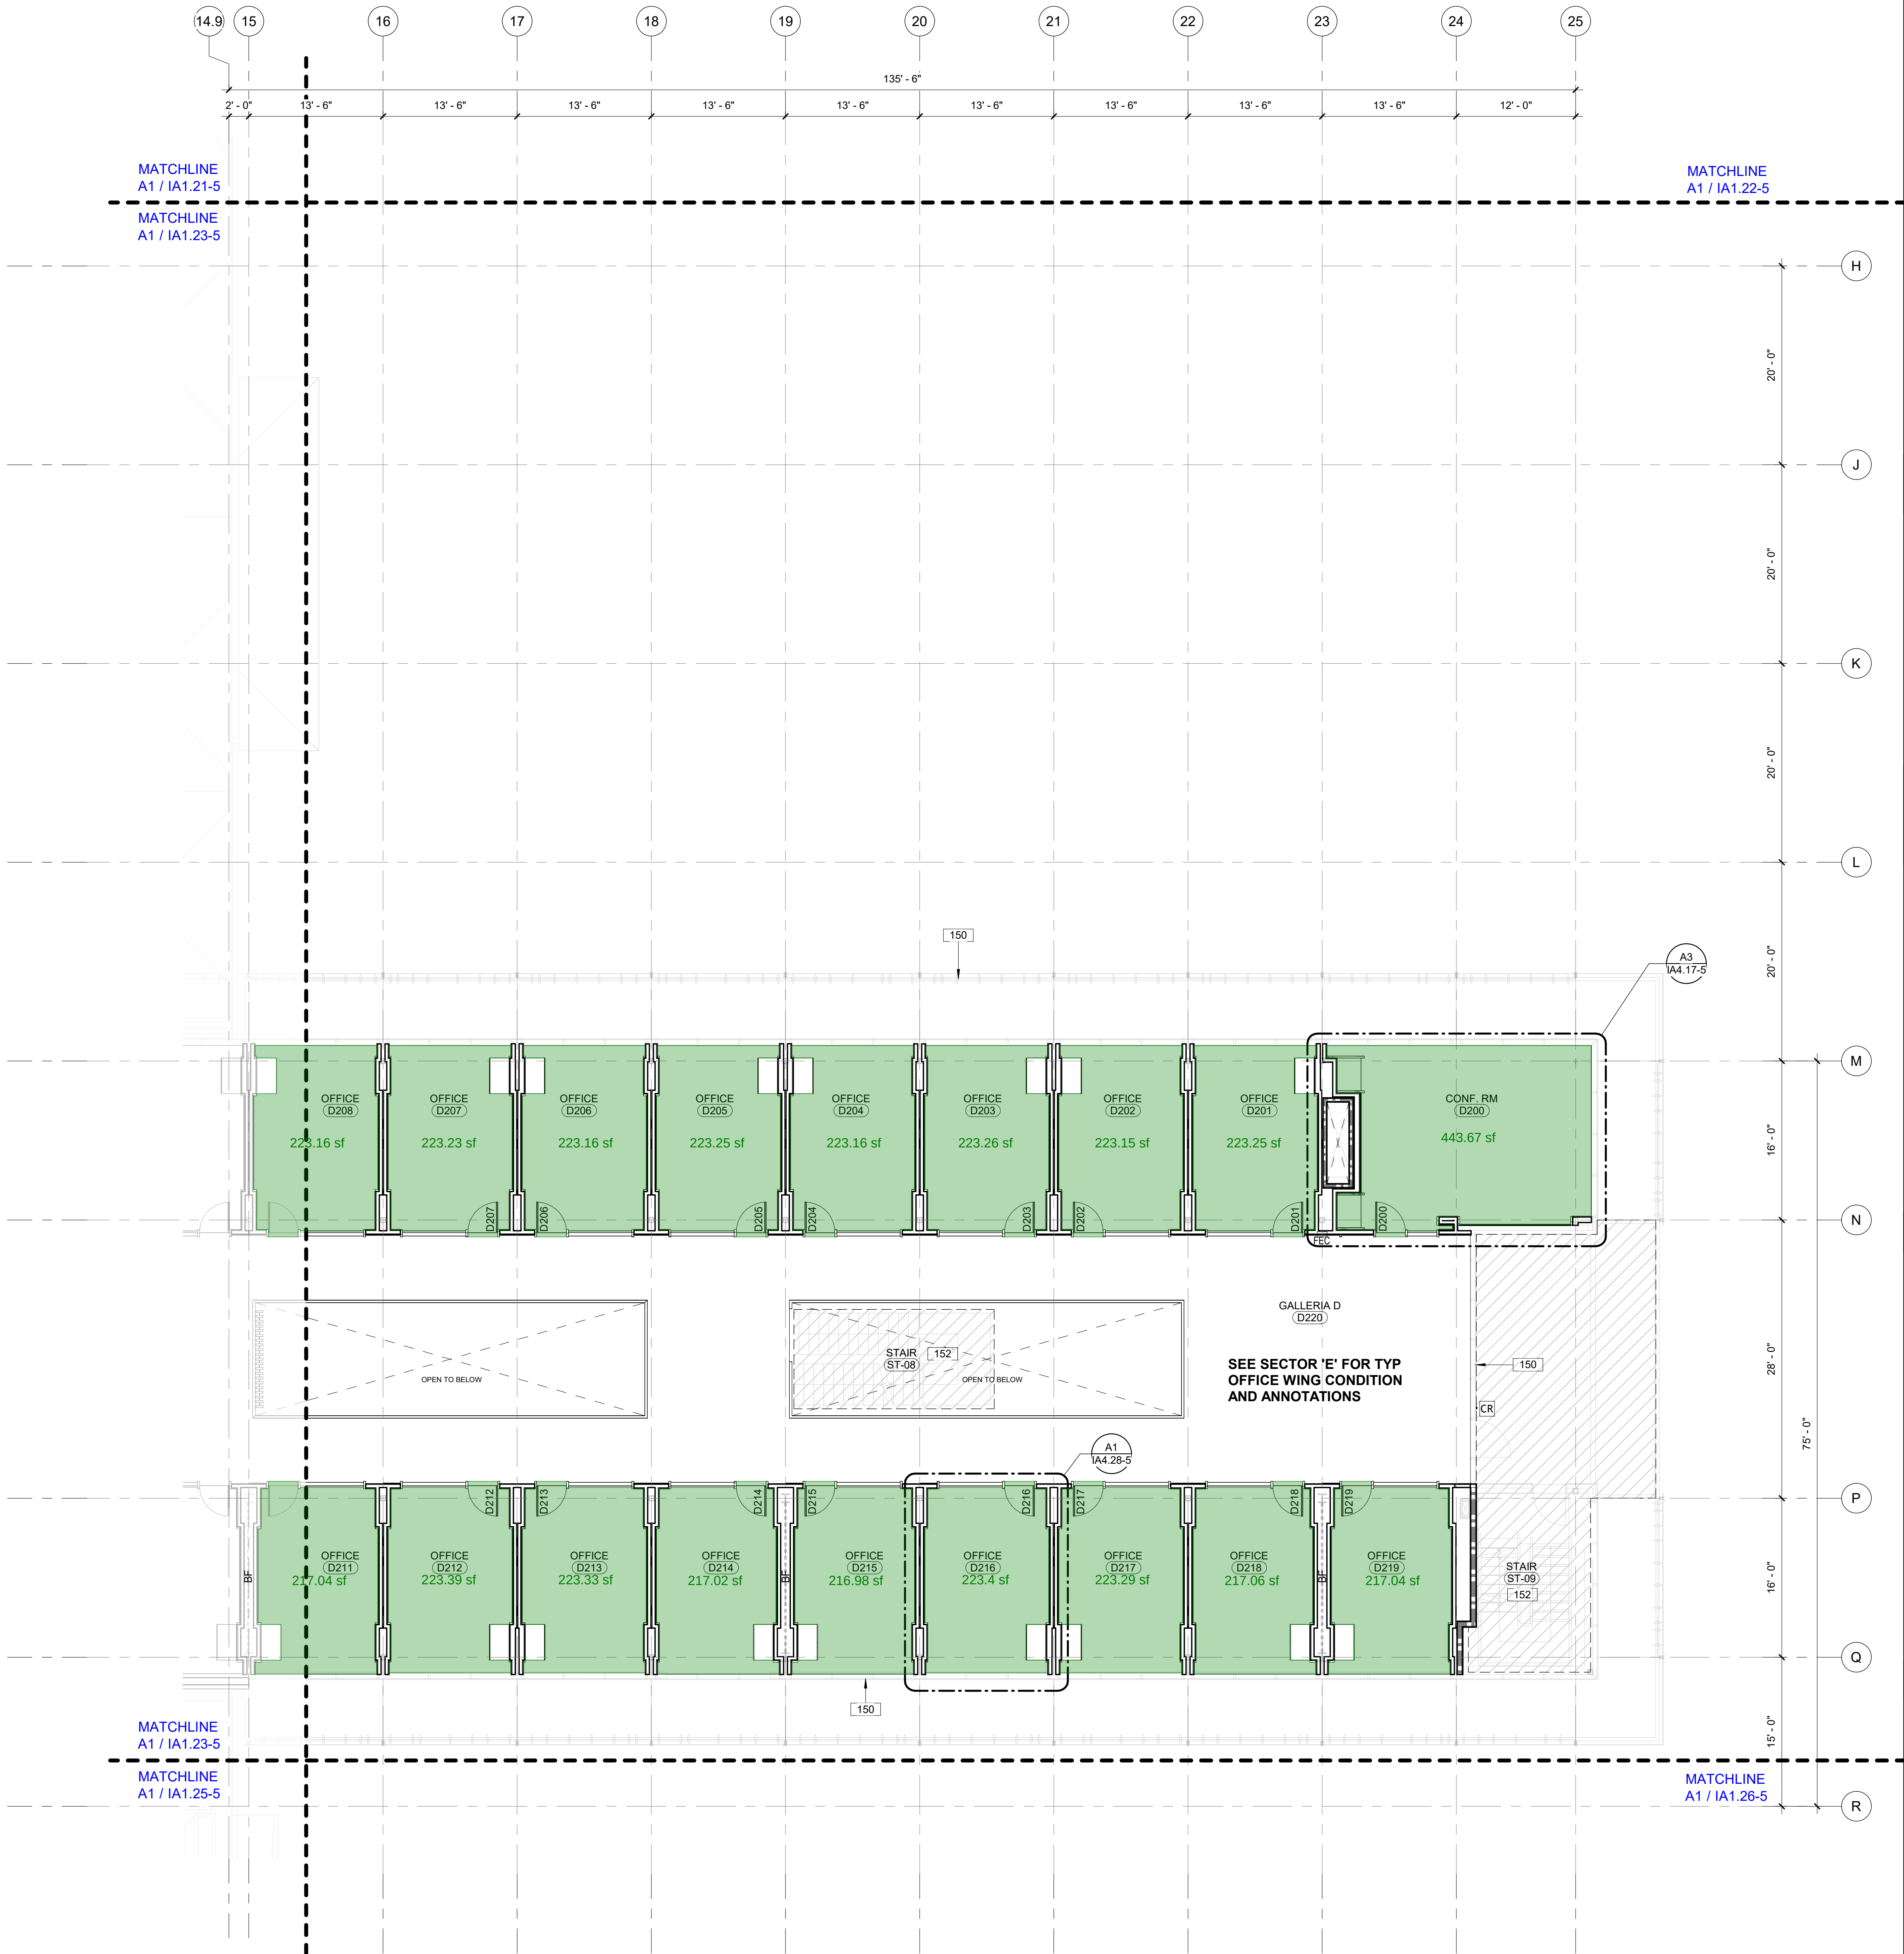

GENERAL NOTES

- CONTRACTOR TO FIELD VERIFY ALL DIMENSIONS.
- REFER TO SHEET A1 / IA1.15-5 FOR REQUIRED ACCESSIBILITY CLEARANCES AND CLEAR WIDTH FOR ACCESSIBLE ROUTES.
- ALL IDF AND ELECTRICAL ROOMS TO RECEIVE FIRE TREATED PLYWOOD ON ALL SIDES UP 6'-0" AFF.
- PROVIDE 4'-0" GLASS FIBER REINFORCED PANELS AROUND SINKS IN ALL JANITOR ROOMS.
- PROVIDE BACKING FOR ALL WALL MOUNTED EQUIPMENT, ACCESSORIES, AND FIXTURES. ALL EQUIPMENT OVER 5'-9" TALL TO BE ANCHORED.
- EXPOSED GWB WALLS TO RECEIVE A LEVEL 5 FINISH, UON. ALL UTILITY ROOMS TO RECEIVE A LEVEL 3 FINISH.
- ALL JANITOR'S ROOMS TO HAVE WATERPROOF FLOOR ASSEMBLY THAT TURNS UP MIN. 6" AT STUD WALLS.
- PROVIDE LEAK DETECTION IN THE FOLLOWING ROOMS: MPOE, MAIN ELECTRICAL, JANITOR'S ROOMS, EV CHARGING ROOM. PROVIDE 6" CURB AT STUD WALLS IN ALL OF THESE LOCATIONS.
- WALL SWITCHES, FIRE ALARMS, SMOKE DEVICES, AND OTHER CEILING DEVICES/REGISTERS TO MATCH ADJACENT WALL/CEILING FINISHES/COLORS, TYP.
- ASSS FINISHES, WHERE EXPOSED TO BE MINIMUM LEVEL 4.
- LOCATE DOORS 4" FROM ADJACENT WALLS. UON.
- ALL INTERIOR JOINT SEALANTS TO MATCH ADJACENT SURFACE FINISHES/COLORS.
- SEE STRUCTURAL FOR SLAB DEPRESSIONS AND COORDINATE DEPTHS OF UNDERLAYMENTS ACCORDINGLY FOR LEVEL FLOOR TRANSITIONS.
- REFER TO BOARD STARTING & DEVICE CENTERING AND ALIGNMENT LOCATIONS NOTES IN FINISH PLANS AND INTERIOR ELEVATIONS FOR FACTORS DRIVING FINISH PATTERN LAYOUT.
- FRAMELESS DOORS WITH CONCEALED HINGES TO BE PROVIDED AT ALL PUBLIC FACING DOORS.
- ALL BASEBOARDS TO BE FLUSH PAINTED MDT. UON.
- I.O.N. FIRE EXTINGUISHER CABINETS TO BE RECESSED WITH FLAT SQUARE EDGE TRIM, STEEL SHEET DOORS AND 1/8 INCH THICK CLEAR FLOAT GLASS SET IN RESILIENT CHANNEL GLAZING GASKET.
- REFER TO FINISH PLANS FOR CENTERLINE OF FLOOR FINISH TRANSITIONS.
- REFER TO ARCHITECT'S DRAWINGS (SEPARATE PERMIT SUBMITTAL) FOR ALL EXTERIOR SHELL COMPONENTS (WALLS, ROOFS, ETC.) AND ALL STAIRS.
- INTERIOR FINISH MATERIALS APPLIED TO WALLS AND CEILINGS SHALL MEET THE FIRE PERFORMANCE AND SMOKE DEVELOPMENT LIMITATIONS PRESCRIBED IN CBC SECTION 803.1 (CBC 801.2).
- INTERIOR FINISH MATERIALS APPLIED TO FLOORS SHALL MEET THE FIRE PERFORMANCE LIMITATIONS PRESCRIBED IN CBC SECTION 804.1 (CBC 801.3).

REFERENCE KEYNOTES

NUMBER	KEYNOTE TEXT
150	EXTERIOR BUILDING ENVELOPE AND FACADE SYSTEM, UNDER SEPARATE PERMIT (BY OTHERS)
152	STAIRS, UNDER SEPARATE PERMIT (BY OTHERS)


SHEET KEYNOTES

NUMBER	SHEET NOTE TEXT
150	EXTERIOR BUILDING ENVELOPE AND FACADE SYSTEM, UNDER SEPARATE PERMIT (BY OTHERS)
152	STAIRS, UNDER SEPARATE PERMIT (BY OTHERS)

FLOOR PLAN LEGEND

- AREA NOT IN SCOPE (BY OTHERS)
- WALL, SEE WALL TYPES ON SHEET IA6.00-5
- 1 HOUR FIRE BARRIER PER CBC SECTION 707
- 2 HOUR FIRE BARRIER PER CBC SECTION 707
- 2 HOUR FIRE WALL, UNDER SEPARATE PERMIT
- 3 HOUR FIRE BARRIER PER CBC SECTION 707
- RECESSED FIRE EXTINGUISHER CABINET WITH CUSTOM DOOR
- FIRE EXTINGUISHER
- CARD READER
- CARD READER/ AUTO DOOR OPENER
- AUTO DOOR OPENER
- AUTOMATED EXTERNAL DEFIBRILLATOR
- DRINKING FOUNTAIN
- BRACE FRAME UNDER SEPARATE PERMIT (BY OTHERS)

KEYLEGEND_SECTOR D

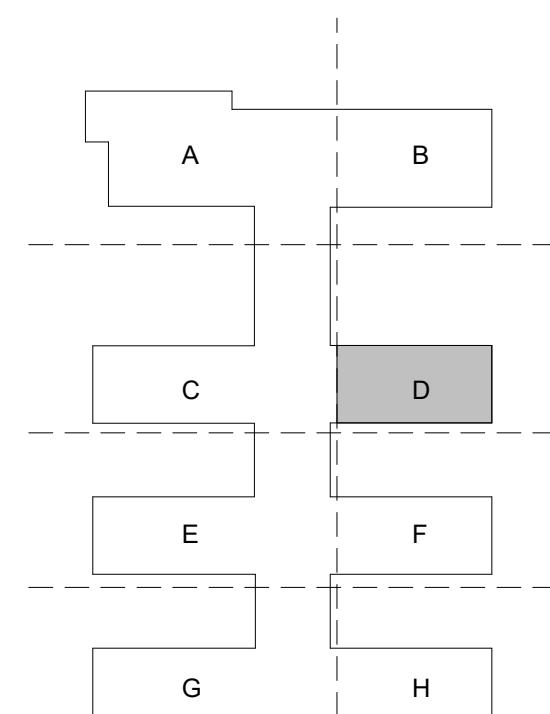

MARINE WAY CAMPUS - MAIN BLDG.

1 SIERRA MEADOW, IRVINE, CA 92618

PROJECT NO. 24353

REV NO.	DATE ISSUED	REASON
2025.11.04	BID SET	
2025.12.09	PERMIT SUBMITTAL	
2026.02.17	BID SET ADDENDUM 1	

RECEIVED
February 18, 2026
MATT CONSTRUCTION

CP-5 BID SET ADDENDUM 1
2026.02.17

Sheet Title
FLOOR PLAN - LVL 2
- SECTOR D

Sheet No.
IA1.24-5


A1 LEVEL 02-ENLARGED PLAN - SECTOR D

A1 / IA4.60-5

1/8" = 1'-0"

0 4'-0" 8'-0" 16'-0"
SCALE: 1/8" = 1'-0"

2/17/2026 4:17:14 PM
ALL DIMENSIONS AND ARRANGEMENTS INDICATED ON THESE DRAWINGS ARE THE PROPERTY OF THE ARCHITECT AND ARE TO BE USED IN CONNECTION WITH THIS SPECIFIC PROJECT AND SHALL NOT BE USED OTHERWISE WITHOUT THE EXPRESSED CONSENT OF THE ARCHITECT.

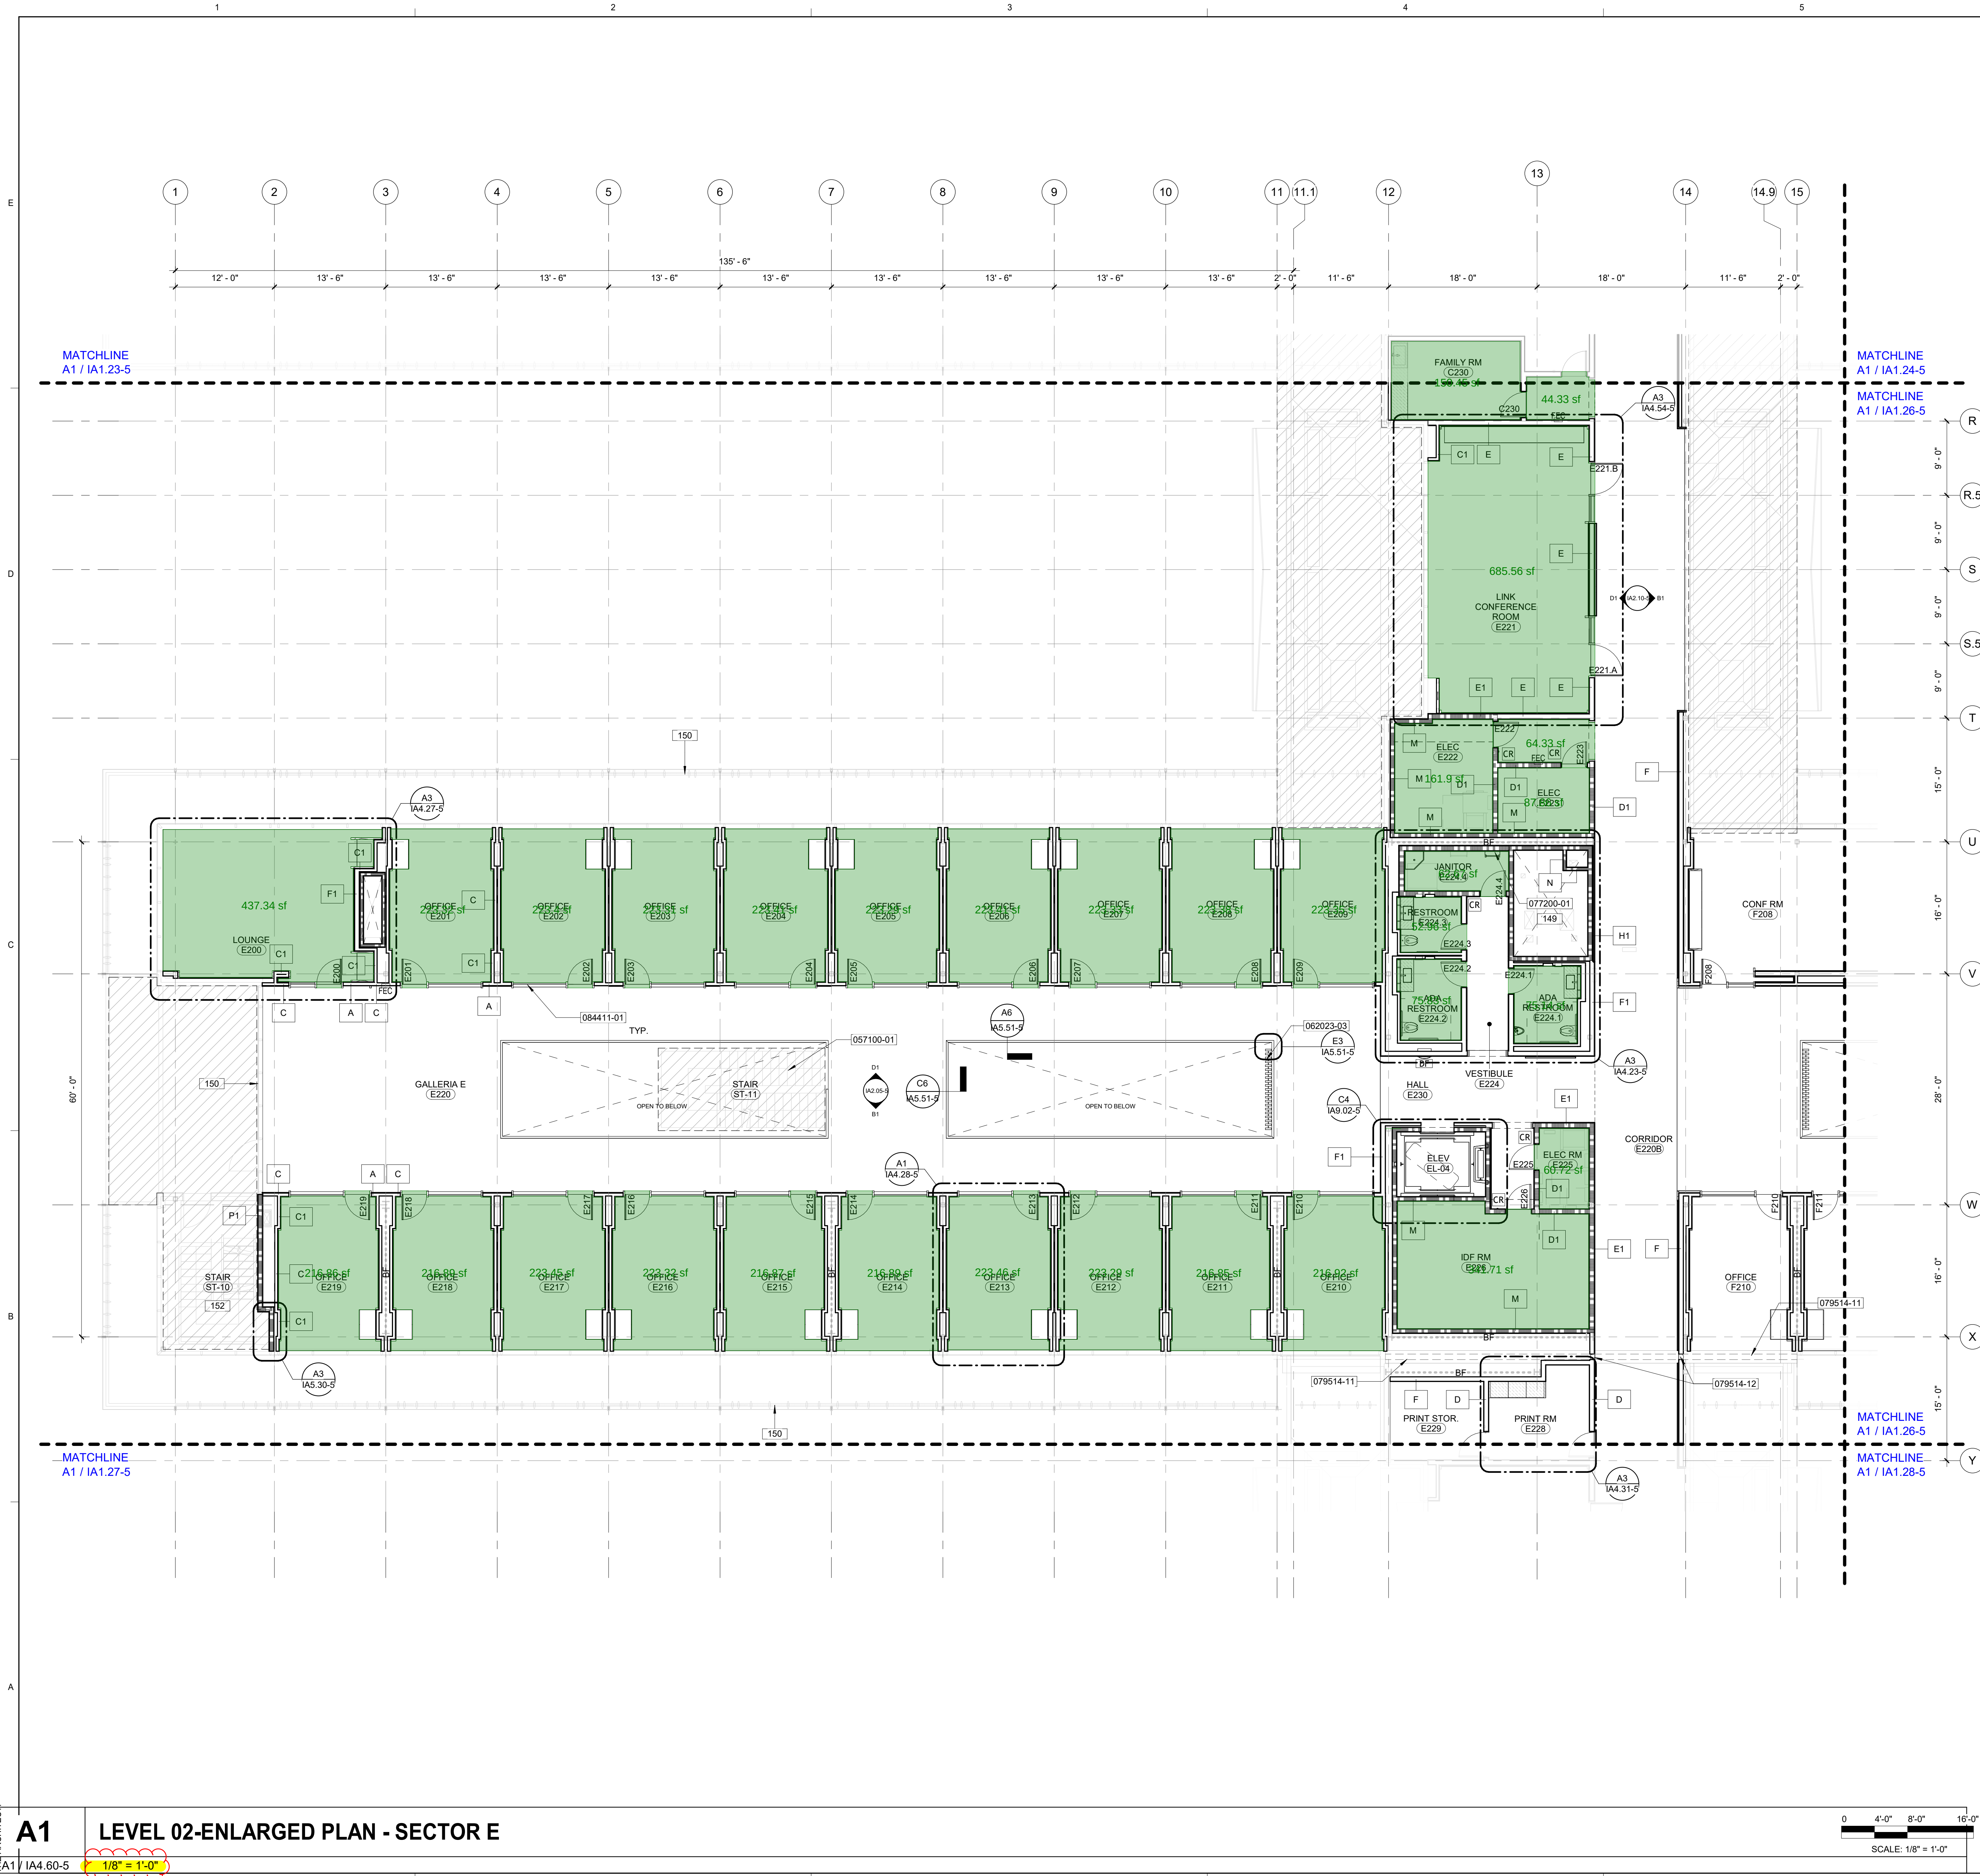

GENERAL NOTES

- CONTRACTOR TO FIELD VERIFY ALL DIMENSIONS.
- REFER TO SHEET A1 / IA1.15-5 FOR REQUIRED ACCESSIBILITY CLEARANCES AND CLEAR WIDTH FOR ACCESSIBLE ROUTES.
- ALL IDF AND ELECTRICAL ROOMS TO RECEIVE FIRE TREATED PLYWOOD ON ALL SIDES UP 6'-0" AFF.
- PROVIDE 4'-0" GLASS FIBER REINFORCED PANELS AROUND SINKS IN ALL JANITOR ROOMS.
- PROVIDE BACKING FOR ALL WALL MOUNTED EQUIPMENT, ACCESSORIES, AND FIXTURES. ALL EQUIPMENT OVER 5'-9" TALL TO BE ANCHORED.
- EXPOSED GWB WALLS TO RECEIVE A LEVEL 5 FINISH, UON. ALL UTILITY ROOMS TO RECEIVE A LEVEL 3 FINISH.
- ALL JANITOR'S ROOMS TO HAVE WATERPROOF FLOOR ASSEMBLY THAT TURNS UP MIN. 6" AT STUD WALLS.
- PROVIDE LEAK DETECTION IN THE FOLLOWING ROOMS: MPOE, MAIN ELECTRICAL, JANITOR'S ROOMS, EV CHARGING ROOM. PROVIDE 6" CURB AT STUD WALLS IN ALL OF THESE LOCATIONS.
- WALL SWITCHES, FIRE ALARM & SMOKE DEVICES, AND OTHER CEILING DEVICES/REGISTERS TO MATCH ADJACENT WALL/CEILING FINISHES/COLORS, TYP.
- ACCESS FINISHES, WHERE EXPOSED TO BE MINIMUM LEVEL 4.
- LOCATE DOORS 4" FROM ADJACENT WALLS, UON.
- ALL INTERIOR JOINT SEALANTS TO MATCH ADJACENT SURFACE FINISHES/COLORS.
- SEE STRUCTURAL FOR SLAB DEPRESSIONS AND COORDINATE DEPTHS OF UNDERLAYMENTS ACCORDINGLY FOR LEVEL FLOOR TRANSITIONS.
- REFER TO BOARD STARTING & DEVICE CENTERING AND ALIGNMENT LOCATIONS NOTES IN FINISH PLANS AND INTERIOR ELEVATIONS FOR FACTORS DRIVING FINISH PATTERN LAYOUT.
- FRAMELESS DOORS WITH CONCEALED HINGES TO BE PROVIDED AT ALL PUBLIC FACING DOORS.
- ALL BASEBOARDS TO BE FLUSH PAINTED MDT, UON.
- I.O.N. FIRE EXTINGUISHER CABINETS TO BE RECESSED WITH FLAT SQUARE EDGE TRIM, STEEL SHEET DOORS AND 1/8 INCH THICK CLEAR FLOAT GLASS SET IN RESILIENT CHANNEL GLAZING GASKET.
- REFER TO FINISH PLANS FOR CENTERLINE OF FLOOR FINISH TRANSITIONS.
- REFER TO ARCHITECT'S DRAWINGS (SEPARATE PERMIT SUBMITTAL) FOR ALL EXTERIOR SHELL COMPONENTS (WALLS, ROOFS, ETC.) AND ALL STAIRS.
- INTERIOR FINISH MATERIALS APPLIED TO WALLS AND CEILINGS SHALL MEET THE FIRE PERFORMANCE AND SMOKE DEVELOPMENT LIMITATIONS PRESCRIBED IN CBC SECTION 803.1 (CBC 801.2).
- INTERIOR FINISH MATERIALS APPLIED TO FLOORS SHALL MEET THE FIRE PERFORMANCE LIMITATIONS PRESCRIBED IN CBC SECTION 804.1 (CBC 801.3).

REFERENCE KEYNOTES

NUMBER	KEYNOTE TEXT
057100-01	DECORATIVE METAL STAIRCASE
052023-03	INTERIOR VERTICAL WOOD SCREEN
077200-01	ROOF ACCESS HATCH
079514-11	SEISMIC FLOOR JOINT (NOT RATED) WITH CUSTOM FINISH TO MATCH ADJACENT FLOOR FINISH, TYPE ISJ-01
079514-12	SEISMIC WALL JOINT (NOT RATED), FIELD PAINTED, TYPE ISJ-02
084411-01	INTERIOR GLAZED TIMBER CURTAIN WALLS PER SCHEDULE


SHEET KEYNOTES

NUMBER	SHEET NOTE TEXT
149	FIRE-RATED MECHANICAL SHAFT ENCLOSURE
150	EXTERIOR BUILDING ENVELOPE AND FACADE SYSTEM, UNDER SEPARATE PERMIT (BY OTHERS)
152	STAIRS, UNDER SEPARATE PERMIT (BY OTHERS)

FLOOR PLAN LEGEND

- AREA NOT IN SCOPE (BY OTHERS)
- WALL, SEE WALL TYPES ON SHEET IA6.00-5
- 1 HOUR FIRE BARRIER PER CBC SECTION 707
- 2 HOUR FIRE BARRIER PER CBC SECTION 707
- 2 HOUR FIRE WALL, UNDER SEPARATE PERMIT
- 3 HOUR FIRE BARRIER PER CBC SECTION 707
- RECESSED FIRE EXTINGUISHER CABINET WITH CUSTOM DOOR
- FIRE EXTINGUISHER
- CARD READER
- CARD READER/ AUTO DOOR OPENER
- AUTO DOOR OPENER
- AUTOMATED EXTERNAL DEFIBRILLATOR
- DRINKING FOUNTAIN
- BRACE FRAME UNDER SEPARATE PERMIT (BY OTHERS)

KEYLEGEND_SECTOR E

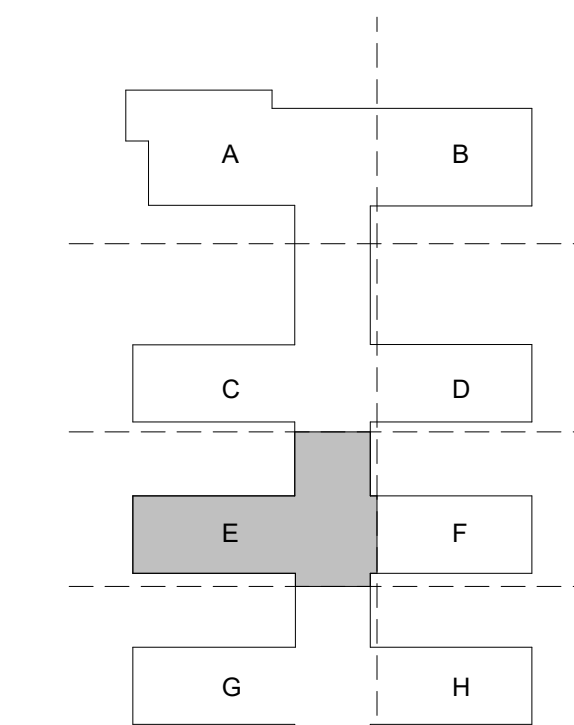

1515 Morena Blvd.
San Diego, CA 92110
(619) 295-6690
delowie.com

MARINE WAY CAMPUS - MAIN BLDG.

1 SIERRA MEADOW, IRVINE, CA 92618

PROJECT NO. 24353

REV NO.	DATE ISSUED	REASON
2025.11.04	BID SET	
2025.12.09	PERMIT SUBMITTAL	
2026.02.17	BID SET ADDENDUM 1	


RECEIVED
February 18, 2026
MATT CONSTRUCTION

CP-5 BID SET ADDENDUM 1
2026.02.17

Sheet Title
FLOOR PLAN - LVL 2
- SECTOR E

Sheet No.
IA1.25-5

2/17/2026 4:17:19 PM
ALL ISSUED DESIGNS AND ARRANGEMENTS INDICATED ON THESE DRAWINGS ARE THE PROPERTY OF THE ARCHITECT AND ARE TO BE USED IN CONNECTION WITH THIS SPECIFIC PROJECT AND SHALL NOT BE USED OTHERWISE WITHOUT THE EXPRESSED CONSENT OF THE ARCHITECT.

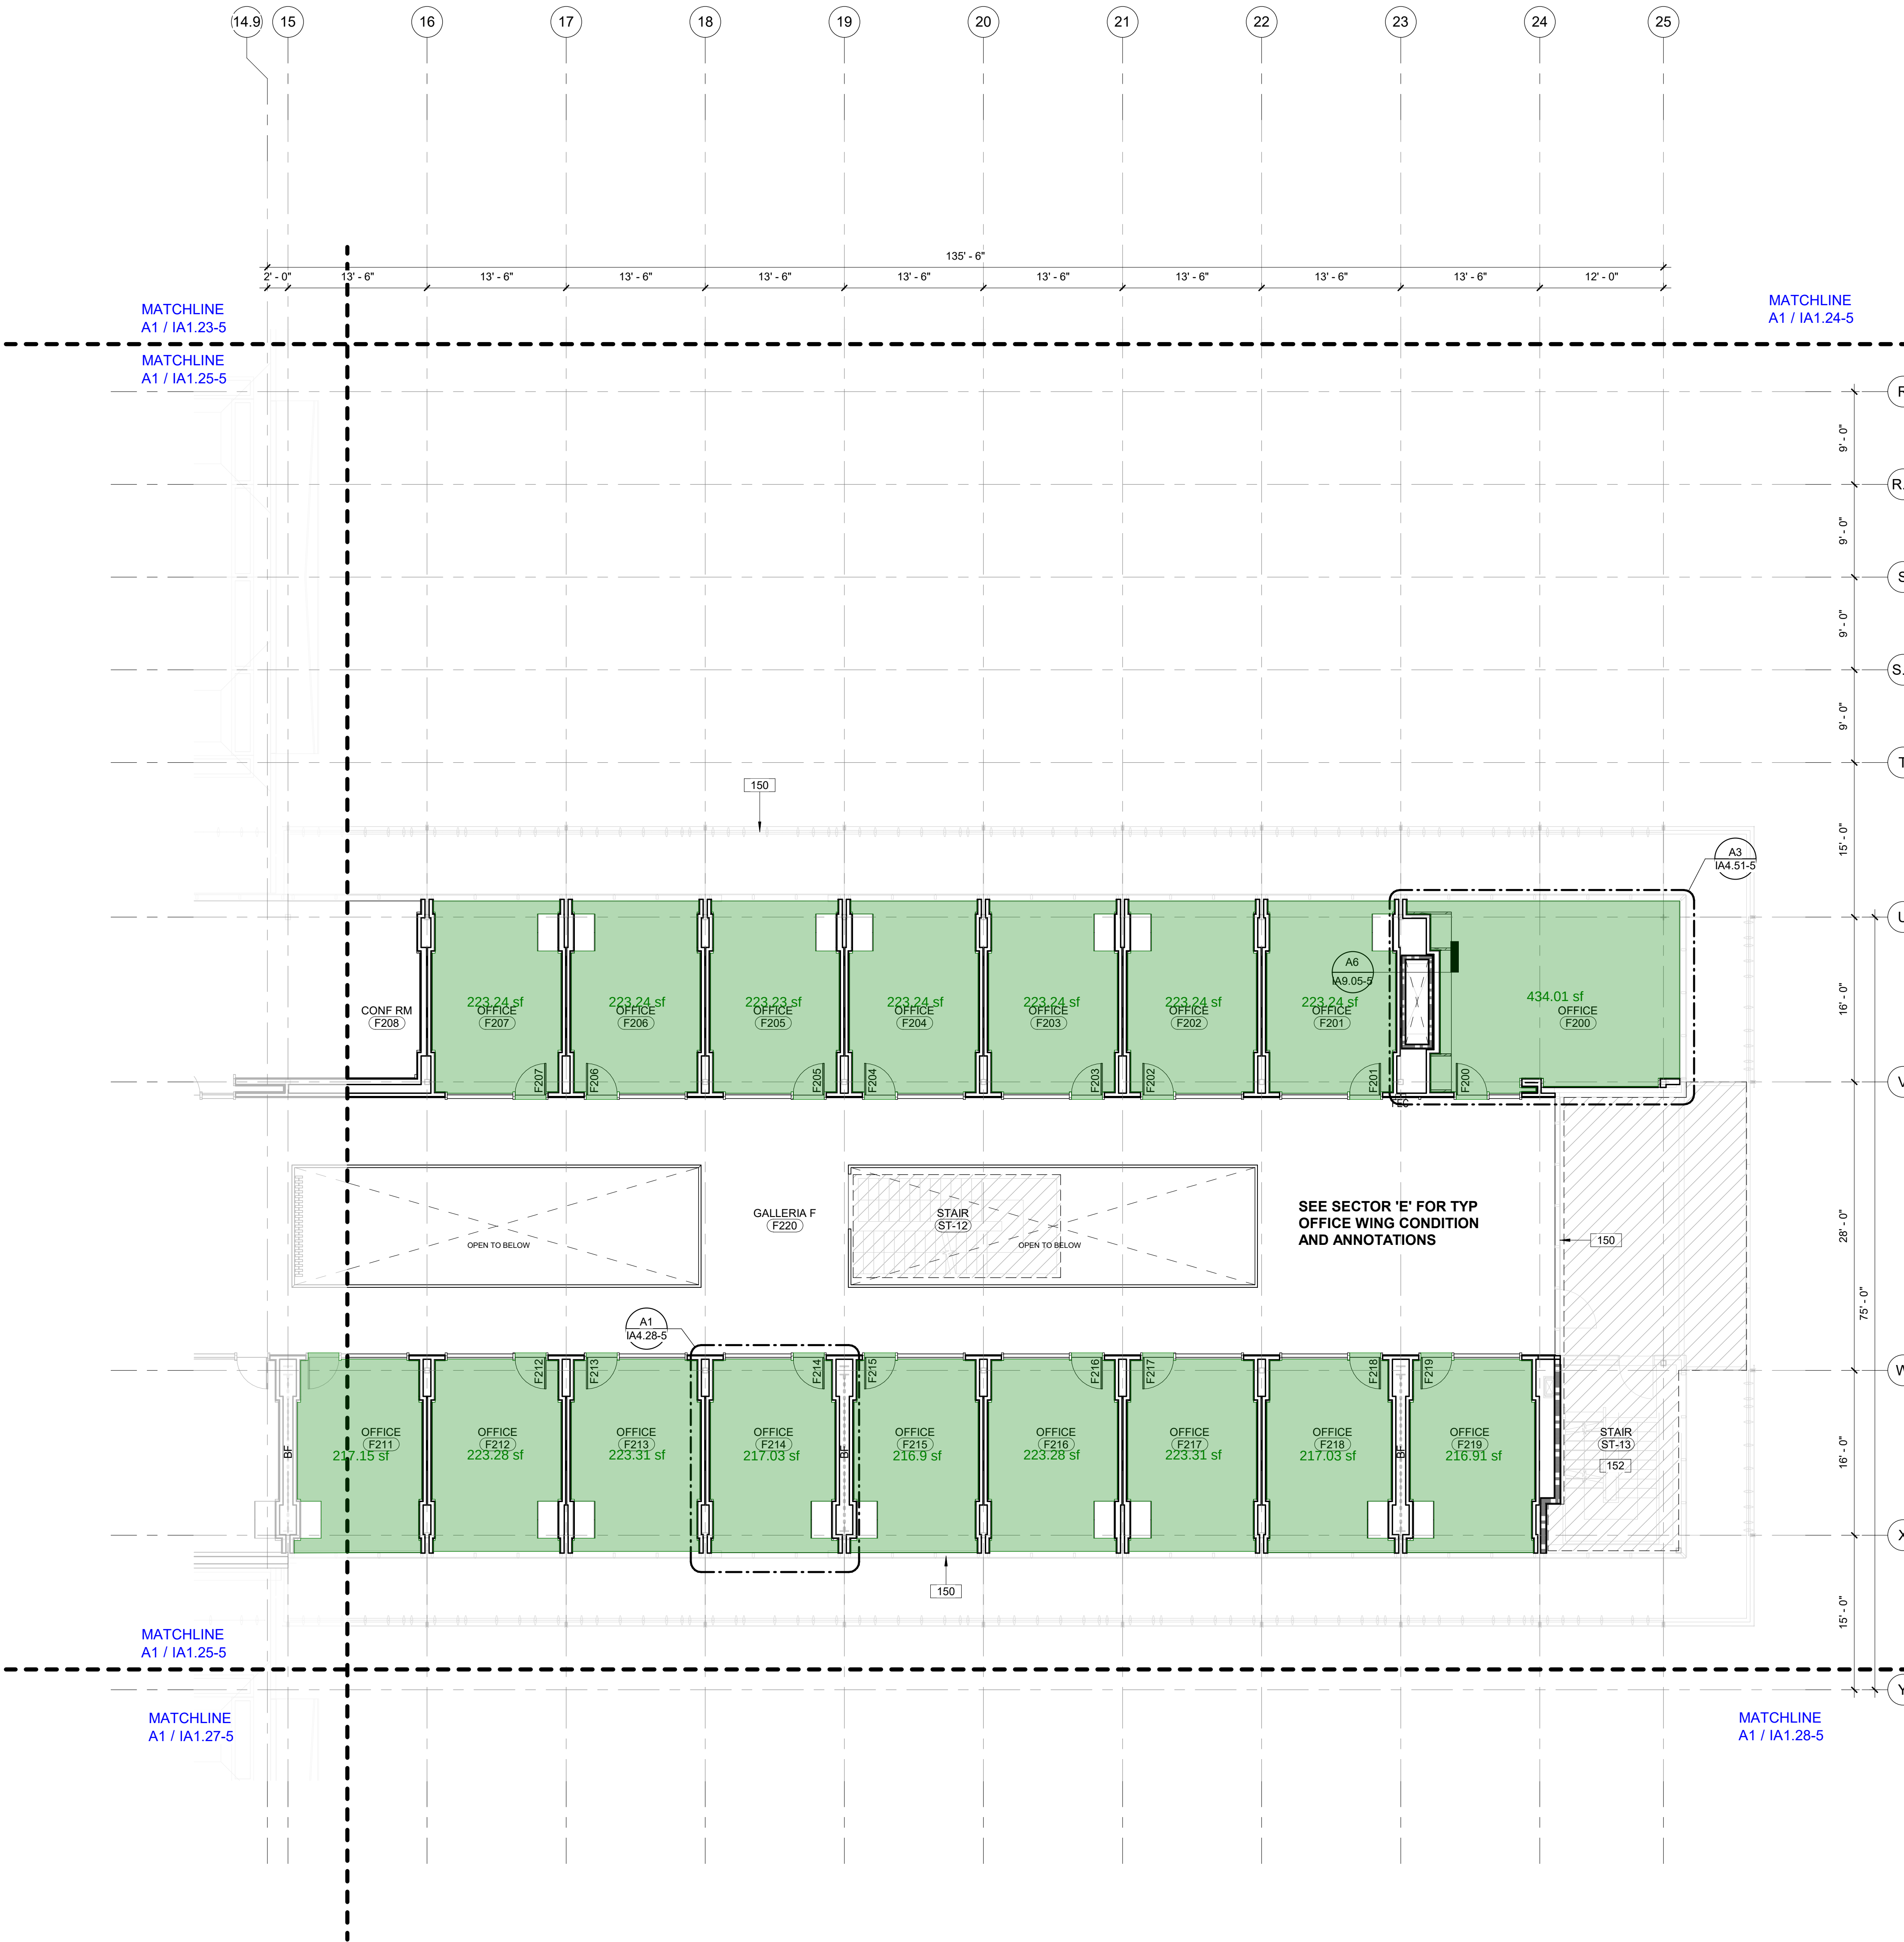

GENERAL NOTES

- CONTRACTOR TO FIELD VERIFY ALL DIMENSIONS.
- REFER TO SHEET A1 / IA1.15-5 FOR REQUIRED ACCESSIBILITY CLEARANCES AND CLEAR WIDTH FOR ACCESSIBLE ROUTES.
- ALL IDF AND ELECTRICAL ROOMS TO RECEIVE FIRE TREATED PLYWOOD ON ALL SIDES UP 6'-0" AFF.
- PROVIDE 4'-0" GLASS FIBER REINFORCED PANELS AROUND SINKS IN ALL JANITOR ROOMS.
- PROVIDE BACKING FOR ALL WALL MOUNTED EQUIPMENT, ACCESSORIES, AND FIXTURES. ALL EQUIPMENT OVER 5'-9" TALL TO BE ANCHORED.
- EXPOSED GWB WALLS TO RECEIVE A LEVEL 5 FINISH, UON. ALL UTILITY ROOMS TO RECEIVE A LEVEL 3 FINISH.
- ALL JANITOR'S ROOMS TO HAVE WATERPROOF FLOOR ASSEMBLY THAT TURNS UP MIN. 6" AT STUD WALLS.
- PROVIDE LEAK DETECTION IN THE FOLLOWING ROOMS: MPOE, MAIN ELECTRICAL, JANITOR'S ROOMS, EV CHARGING ROOM. PROVIDE 6" CURB AT STUD WALLS IN ALL OF THESE LOCATIONS.
- WALL SWITCHES, FIRE ALARM & SMOKE DEVICES, AND OTHER CEILING DEVICES/REGISTERS TO MATCH ADJACENT WALL/CEILING FINISHES/COLORS, TYP.
- ASS FINISHES, WHERE EXPOSED TO BE MINIMUM LEVEL 4.
- LOCATE DOORS 4" FROM ADJACENT WALLS, UON.
- ALL INTERIOR JOINT SEALANTS TO MATCH ADJACENT SURFACE FINISHES/COLORS.
- SEE STRUCTURAL FOR SLAB DEPRESSIONS AND COORDINATE DEPTHS OF UNDERLAYMENTS ACCORDINGLY FOR LEVEL FLOOR TRANSITIONS.
- REFER TO BOARD STARTING & DEVICE CENTERING AND ALIGNMENT LOCATIONS NOTES IN FINISH PLANS AND INTERIOR ELEVATIONS FOR FACTORS DRIVING FINISH PATTERN LAYOUT.
- FRAMELESS DOORS WITH CONCEALED HINGES TO BE PROVIDED AT ALL PUBLIC FACING DOORS.
- ALL BASEBOARDS TO BE FLUSH PAINTED MDT, UON.
- I.O.N. FIRE EXTINGUISHER CABINETS TO BE RECESSED WITH FLAT SQUARE EDGE TRIM, STEEL SHEET DOORS AND 1/8 INCH THICK CLEAR FLOAT GLASS SET IN RESILIENT CHANNEL GLAZING GASKET.
- REFER TO FINISH PLANS FOR CENTERLINE OF FLOOR FINISH TRANSITIONS.
- REFER TO ARCHITECT'S DRAWINGS (SEPARATE PERMIT SUBMITTAL) FOR ALL EXTERIOR SHELL COMPONENTS (WALLS, ROOFS, ETC.) AND ALL STAIRS.
- INTERIOR FINISH MATERIALS APPLIED TO WALLS AND CEILINGS SHALL MEET THE FIRE PERFORMANCE AND SMOKE DEVELOPMENT LIMITATIONS PRESCRIBED IN CBC SECTION 803. (CBC 801.2)
- INTERIOR FINISH MATERIALS APPLIED TO FLOORS SHALL MEET THE FIRE PERFORMANCE LIMITATIONS PRESCRIBED IN CBC SECTION 804. (CBC 801.3)

REFERENCE KEYNOTES

NUMBER	KEYNOTE TEXT
150	EXTERIOR BUILDING ENVELOPE AND FACADE SYSTEM, UNDER SEPARATE PERMIT (BY OTHERS)
152	STAIRS, UNDER SEPARATE PERMIT (BY OTHERS)


SHEET KEYNOTES

NUMBER	SHEET NOTE TEXT
150	EXTERIOR BUILDING ENVELOPE AND FACADE SYSTEM, UNDER SEPARATE PERMIT (BY OTHERS)
152	STAIRS, UNDER SEPARATE PERMIT (BY OTHERS)

FLOOR PLAN LEGEND

- AREA NOT IN SCOPE (BY OTHERS)
- WALL, SEE WALL TYPES ON SHEET IA6.00-5
- 1 HOUR FIRE BARRIER PER CBC SECTION 707
- 2 HOUR FIRE BARRIER PER CBC SECTION 707
- 2 HOUR FIRE WALL, UNDER SEPARATE PERMIT
- 3 HOUR FIRE BARRIER PER CBC SECTION 707
- RECESSED FIRE EXTINGUISHER CABINET WITH CUSTOM DOOR
- FIRE EXTINGUISHER
- CARD READER
- CARD READER/ AUTO DOOR OPENER
- AUTO DOOR OPENER
- AUTOMATED EXTERNAL DEFIBRILLATOR
- DRINKING FOUNTAIN
- BRACE FRAME UNDER SEPARATE PERMIT (BY OTHERS)

KEYLEGEND_SECTOR F

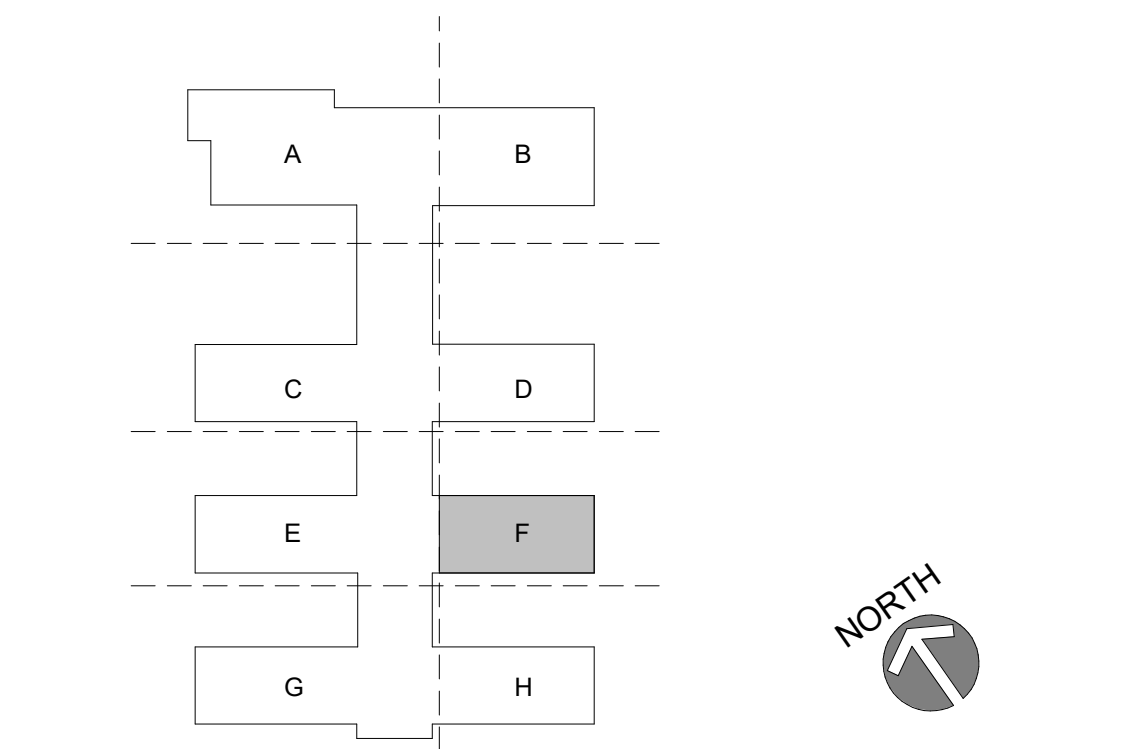

MARINE WAY CAMPUS - MAIN BLDG.
1 SIERRA MEADOW, IRVINE, CA 92618

PROJECT NO. 24353

REV NO.	DATE ISSUED	REASON
	2025.11.04	BID SET
	2025.12.09	PERMIT SUBMITTAL
	2026.02.17	BID SET ADDENDUM 1

RECEIVED
February 18, 2026
MATT CONSTRUCTION

CP-5 BID SET ADDENDUM 1
2026.02.17
Sheet Title
FLOOR PLAN - LVL 2 - SECTOR F

Sheet No.
IA1.26-5

A1 LEVEL 02-ENLARGED PLAN - SECTOR F
A1 / IA4.60-5 1/8" = 1'-0"

